



<b>Part Number</b>	INT13-TGG 0B 307 CLADXXZ
<b>Size/Series</b>	0B (Metal (Mechanical Keying))
<b>MECHANICAL DETAILS</b>	
<b>Shell Style/Model</b>	Straight plug,cable collet
<b>Keying</b>	1 key (alpha=0,plug: male contacts,receptacle: female contacts)
<b>Housing Material</b>	Brass (chrome plated) shell and collet nut,nickel plated brass latch sleeve and mid pieces.
<b>Cable Fixing</b>	3.0 - 5 mm (0.11 - 0.2")
<b>Variant</b>	None

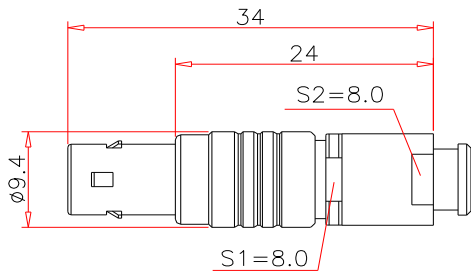

**PERFORMANCE DETAILS**

<b>Insert</b>	7 Low Voltage
<b>Configuration</b>	Brass (gold plated)
<b>Insulator</b>	P: PPS



<b>Specifications</b>	Low Voltage	Contact Type: Solder
		Max. Matings: 5000
		Contact Dia.: 0.5 mm (0.02")
		Bucket Dia.: 0.45 mm (0.018")

		Max. Solid Conductor: 0.09 mm <sup>2</sup> (AWG 28)
		Max. Stranded Conductor: 0.09 mm <sup>2</sup> (AWG 28)
		R (max): 10 mOhm
		Vtest (contact-shell): 700 V
		Vtest (contact-contact): 800 V
		Rated Current: 2.5A (AC/DC)

**OTHER CHARACTERISTICS**

<b>Endurance (Shell):</b>	5000 mating cycles
Temp (min)	-40 deg
Temp (max):	200 deg C
Humidity (max):	<=95% [at 60 deg C / 140 F]
Vibration	15 g [10 Hz - 2000 Hz]
Shock Resistance	100 g [ 6 ms]
Salt Spray Corrosion	>144 hr
IP Rating	50
Shielding (min):	75 dB (10 MHz)
Shielding (min):	40 dB (1 GHz)
P op (max):	60 bar (870 psi)